

EU TYPE-EXAMINATION CERTIFICATE (MODULE B) REGULATION (EU) 2016/426


This is to certify that the appliances listed have been examined and found to comply with the essential requirements listed in the **Regulation (EU) 2016/426** of the European Parliament and of the council of 9 March 2016 on appliances burning gaseous fuels (Annex I).

To demonstrate full compliance with the Regulation (EU) 2016/426, a "Conformity to Type" Module C2 or D or E or F is required.

Applicant: Immergas S.p.A.
Address: Via Cisa Ligure, 95, 42041 Brescello (RE)
Trade Mark: IMMERGAS
Product Type: Central heating condensing boiler
Models: VICTRIX EXA 24; VICTRIX EXA 28
Certificate N°: ITS-2575-GAR-21.2965406-R1
PIN: 2575DM296542

This certificate only relates to those products detailed in the following Test Reports:

Report Number: 200029654UDI-GCEb-RCE



Certificate Issue date:
20 September 2021

Certificate Expiry date:
05 September 2031

Gino Baiocco

Certification Officer
Intertek Italia SpA (NB 2575)



PDR N° 277B

Membro degli Accordi di Mutuo Riconoscimento EA, IAF e ILAC

Signatory of EA, IAF and ILAC Mutual Recognition Agreements



This Certificate is for the exclusive use of Intertek's client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this Certificate. Only the Client is authorized to permit copying or distribution of this Certificate and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek.

PRODUCT DESCRIPTION

PRODUCT TYPE:	Central heating condensing boiler
MODELS:	VICTRIX EXA 24; VICTRIX EXA 28
STANDARD(S):	EN 15502-1:2012+A1:2015 and EN 15502-2-1:2012+A1:2016
SPECIAL REMARKS:	-
APPLIANCES TYPE:	C ₁₃ , C ₃₃ , C ₄₃ , C ₅₃ , C ₈₃ , C ₉₃ , B _{23P} , B ₃₃ , B _{53P}

The gas categories for which the appliances have been tested can be obtained by combining the following countries and gas groups:

COUNTRIES: AT, BE, BG, CH, CZ, DE, DK, EE, ES, FI, GB, GR, IE, IT, NO, NL, PL, PT, RO, SE, SI, SK, TR

GAS GROUP, REFERENCE GAS AND SUPPLY PRESSURES:

GROUP	REFERENCE GAS	GROUP	REFERENCE GAS	GROUP	REFERENCE GAS
H	G20 – 20 mbar	Lw	G27 – 20 mbar	P	G31 – 50 mbar
E	G20 – 20 mbar	P	G31 – 37 mbar	B/P	G30/G31 – 30 mbar
E(S)	G20/G25-20/25 mbar	P	G31 – 36 mbar	B/P	G30/G31 – 50 mbar

REVISION AND COMMENTS

DD/MM/YYYY	AMENDED BY	PRJ NO.	REPORT NO.	REASON FOR REVISION
06/09/2021	G. Baiocco	29654	200029654UDI-GCEb-RCE	R0: First issue
20/09/2021	G. Baiocco	-	-	R1: corrected typos on gas groups

EC TYPE-EXAMINATION CERTIFICATE (MODULE B) DIRECTIVE 92/42/EEC

This is to certify that, with reference to the Council Directive 92/42/EEC of 21 May 1992 on efficiency requirements for new hot-water boilers fired with liquid or gaseous fuels and according to article 4 of commission regulation (EU) No. 813/2013, the appliances listed have achieved the full and part load efficiencies written on Annex 1.

To demonstrate full compliance with the Directive 92/42/EEC, a "Conformity to type" Module C or D or E is required.

Applicant: Immergas S.p.A.
Via Cisa Ligure, 95, 42041 Brescello (RE)

Trade Mark: IMMERGAS

Product Type: Central heating condensing boiler

Models: VICTRIX EXA 24; VICTRIX EXA 28


Certificate N°: ITS-2575-BED-212965406

PIN: 2575DM296542

Standard(s): EN 15502-1:2012+A1:2015 and EN 15502-2-1:2012+A1:2016

This certificate only relates to those products detailed in the following Test Reports:

Report Number: 200029654UDI-GCEb-RCE

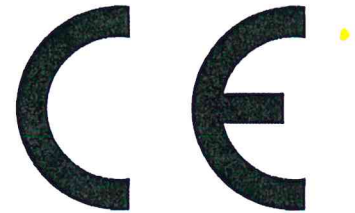

Certificate Issue date:
06 September 2021

Gino Baiocco

Certification Officer
Intertek Italia SpA (NB 2575)



PDR N° 277B

Membro degli Accordi di Mutuo Riconoscimento EA, IAF e ILAC

Signatory of EA, IAF and ILAC Mutual Recognition Agreements



This Certificate is for the exclusive use of Intertek's client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this Certificate. Only the Client is authorized to permit copying or distribution of this Certificate and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek.

ANNEX 1

Models:				
	VICTRIX EXA 24	VICTRIX EXA 28		
η_{100}	98,1 %	98,6 %		
η_{30}	107,7 %	107,5 %		
η_4	88,4 %	88,8 %		
η_1	97 %	96,8 %		
P_4	23,7 kW	28 kW		
P_1	7,8 kW	9,2 kW		
C.Heater?	Yes	Yes		
B ₁ Boiler?	No	No		
Type of boiler:	Condensing	Condensing		

Note: η_{100} = At rated heat output and high-temperature regime - NCV (*) - EN15502-1 clause 9.5.2.1: "the useful efficiency at nominal heat input Q_n or for range rated boilers at the arithmetic mean of the maximum and minimum heat input Q_a "
 η_{30} = At 30 % of rated heat output and low-temperature regime - NCV (**) - EN15502-1 clause 9.5.2.1: "the useful efficiency at 30 % of the nominal heat input Q_n or for range rated boilers at 30 % of the arithmetic mean of the maximum and minimum heat input Q_a "
 η_4 = At rated heat output and high-temperature regime (*)
 η_1 = At 30 % of rated heat output and low-temperature regime (**)
 P_4 = At rated heat output and high-temperature regime (*)
 P_1 = At 30 % of rated heat output and low-temperature regime (**)
 C.Heater = Combination Heater (Yes = with domestic hot water production / No = Heating system only)
 B1 Boiler = B1 according CEN/TR 1749:2014
 Type of boiler: "Condensig Boiler" or "Low Temperature Boiler" or "Other Boiler"

(*) High-temperature regime means 60 °C return temperature at heater inlet and 80 °C feed temperature at heater outlet.
 (**) Low temp. means for condensing boilers 30 °C, for low-temp. boilers 37 °C and for other heaters 50 °C return temperature (at heater inlet).

(n.t. = not tested; n.a. = not applicable)

REVISION AND COMMENTS

DD/MM/YYYY	AMENDED BY	PRJ NO.	REPORT NO.	REASON FOR REVISION
06/09/2021	G. Baiocco	29654	200029654UDI-GCEb-RCE	R0: First issue